


Masonry Boxes and Accessories

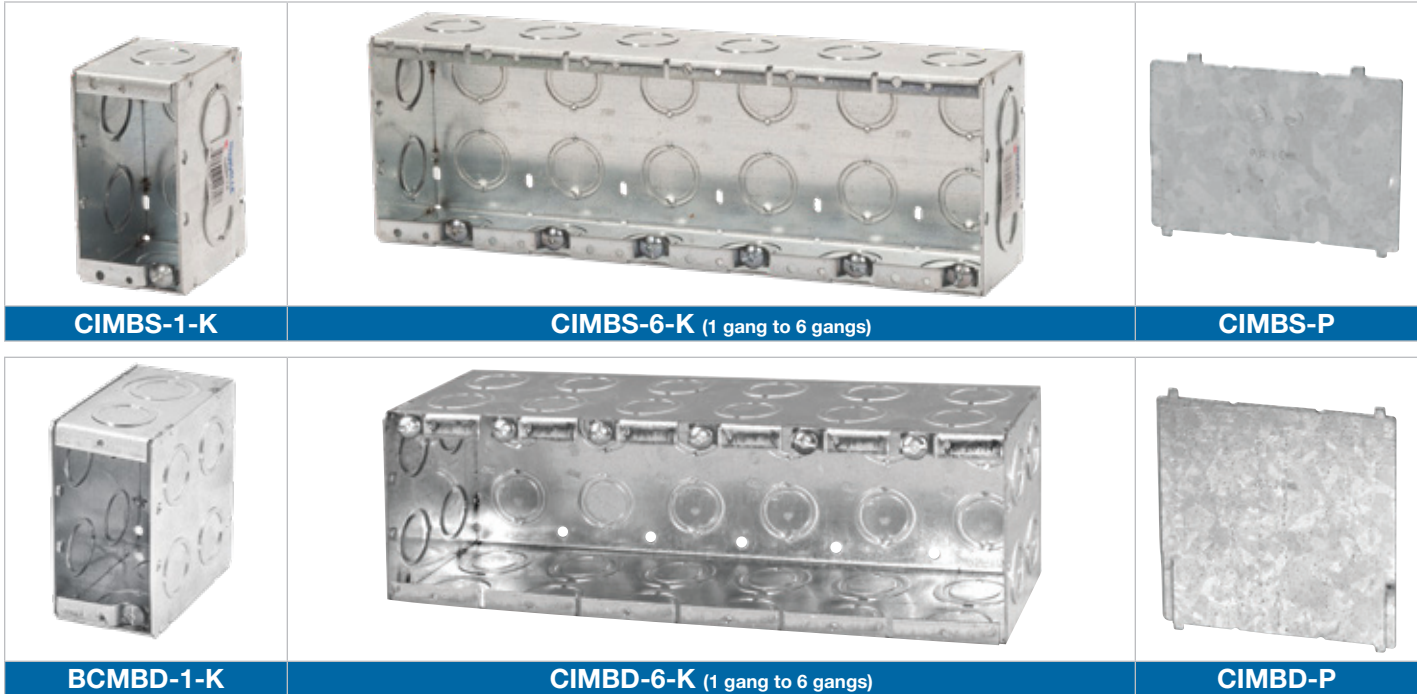

| Cat. No. | Volume (Cu. in.) | Number of Gangs | Width (in.) | 1/2 in. and 3/4 in. Concentric Knockouts | | | 1/2 in., 3/4 in. and 1 in. Concentric KOs (ends) |
|--|------------------|-----------------|-------------|--|--------|------|--|
| | | | | sides | bottom | ends | |
| 2-1/2 in. Deep x 3-3/4 in. High | | | | | | | |
| CIMBS-1-K | 14.0 | 1 | 2 | 4 | 2 | 2 | - |
| CIMBS-2-K | 28.0 | 2 | 3-25/32 | 4 | 4 | 4 | - |
| CIMBS-3-K | 42.0 | 3 | 5-19/32 | 4 | 6 | 6 | - |
| CIMBS-4-K | 56.0 | 4 | 7-13/32 | 4 | 8 | 8 | - |
| CIMBS-5-K | 70.0 | 5 | 9-7/32 | 4 | 10 | 10 | - |
| CIMBS-6-K | 84.0 | 6 | 11-1/32 | 4 | 12 | 12 | - |
| 3-1/2 in. Deep x 3-3/4 in. High | | | | | | | |
| BCMBD-1-K | 21.0 | 1 | 2 | 8 | 2 | 3 | 1 |
| CIMBD-2-K | 42.0 | 2 | 3-25/32 | 8 | 4 | 6 | 2 |
| CIMBD-3-K | 63.0 | 3 | 5-19/32 | 8 | 6 | 9 | 3 |
| CIMBD-4-K | 84.0 | 4 | 7-13/32 | 8 | 8 | 12 | 4 |
| CIMBD-5-K | 105.0 | 5 | 9-7/32 | 8 | 10 | 15 | - |
| CIMBD-6-K | 126.0 | 6 | 11-1/32 | 8 | 12 | 18 | - |

Note: On multi-gang boxes, lateral spacing between mounting holes is 1-13/16 in.

| Cat. No. | Description |
|--------------------|--|
| Accessories | |
| CIMBS-P | Steel partition for MBS 2-1/2 in. deep masonry boxes |
| CIMBD-P | Steel partition for MBD 3-1/2 in. deep masonry boxes |

In accordance with C.E.C. 2012 Edition, Rule 12-3030: Conductors that are connected to different power or distribution transformers or other different sources of voltage shall not be installed in the same box, cabinet, or fitting unless a barrier of sheet steel not less than 1.3 mm thick or a flame-retardant nonmetallic insulating material not less than 1.6 mm in thickness is used to divide the space into separate compartments for the conductors of each system.