

### 4 Inch Core Through Floor Fittings




- Step down installation clips allow the fitting to be installed or removed from the floor above
- Fire barrier expands during fire conditions to maintain the floor's fire rating
- Adjustable lower fire barrier accommodates concrete floor thicknesses from 2¼ to 7 in.
- Oversized EMT conduit tubes for increased cable capacity

### Features




- Accepts all Hubbell SystemOne covers and sub-plates
- Excellent solution for retrofit and new construction
- Delivers power, voice, data and multimedia
- UL listed for use in 1 – 4 hour fire rated floors at 100% rated fill
- Available with integral power junction box
- SystemOne Fire-Rated Poke-Throughs are approved for use in the City of Chicago
- UL installation spacing - minimum 2 feet on center, not more than one per 65 square feet of floor area in each span

### Universal Flange and Cover Assembly



- Hinged doors open 180 degrees flush to the carpet flange or tile
- Locking studs allow each door to be secured independently
- The universal carpet or tile flange can be used for Hubbell SystemOne Fire-Rated Poke-Throughs and Floor Boxes
- Finishes and colors available:

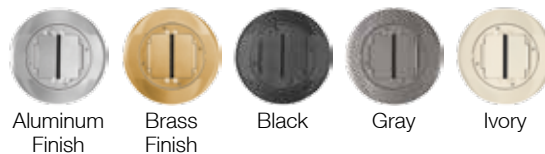


### Features

- Durable cast aluminum construction available in black, gray, brass, aluminum and ivory powder coat finishes
- Features ScrubShield<sup>®</sup> technology that exceeds UL514A scrub water exclusion requirements
- Provides consistent look and maximum functionality throughout the installed life
- Meets ADA standards for accessible design, section 4.3.8

### Hubbell SystemOne Sub-Plates

Hubbell's modular sub-plate design allows users to economically upgrade Hubbell SystemOne FRPT and Floor Boxes to accommodate future moves, additions and changes. See page P-18 for additional information.



4x4 Sub-Plate



Datacom and Power Sub-Plate



Extron<sup>®</sup> APP/MAPP and Power Sub-Plate



Dual Style Line<sup>®</sup> Decorator Sub-Plate



Twist-Lock<sup>®</sup> Sub-Plate



Furniture Feed Cover, Carpet

### Features

- Durable cast aluminum construction, powder coat finish
- Hubbell 4X4: four 20A, 125V receptacles, four keystone openings for voice/data jacks and flush multimedia connectors
- Hubbell X-END and Hubbell iSTATION modular connectivity
- Accommodates Extron<sup>®</sup> Electronics Architectural Series audio/video system integration products
- Accommodates GFCI, surge and standard Style Line<sup>®</sup> Decorator receptacles
- Twist-Lock<sup>®</sup> receptacle with two flush keystone openings
- Large capacity and multi-service furniture feed applications
- Open system sub-plates permit maximum data flexibility

Extron<sup>®</sup> is a registered trademark of Extron Electronics. Simon<sup>™</sup> is a trademark of The Simon Company. Panduit<sup>®</sup> is a registered trademark of Panduit Corp. SYSTIMAX<sup>®</sup> is a registered trademark of CommScope, Inc. Ortronics<sup>®</sup> is a registered trademark of Ortronics/Legrand.

# Fire-Rated Poke-Throughs for Concrete Floors

## 2X2 Flush FRPT


### 3 Inch Core Hole Units

#### 2X2 Flush FRPT, One-Piece Units (PT2X2FIT)

Description	Color	Catalog Number	Description	Color/Material	Catalog Number
2X2 Poke-Through Non-metallic Cover	Black Gray Black Gray	<b>PT2X2BL</b> <b>PT2X2GY</b> <b>PT2X2IGBL*</b> <b>PT2X2IGGY*</b>	2X2 Poke-Through	Black/Brass Brass Finish/Brass Black/Brass Brass Finish/Brass	<b>PT2X2BRS3</b> <b>PT2X2BRS</b> <b>PT2X2IGBRS3*</b> <b>PT2X2IGBRS*</b>
<ul style="list-style-type: none"> <li>Pre-wired 20A Style Line<sup>®</sup> decorator receptacle and (2) Category 5e data jacks</li> <li>Painted aluminum flange</li> <li>Approved for use in the City of Chicago</li> </ul>		<ul style="list-style-type: none"> <li>Pre-wired 20A Style Line<sup>®</sup> decorator receptacle and (2) Category 5e data jacks</li> <li>Solid brass flange</li> <li>Approved for use in the City of Chicago</li> </ul>			

Note: \*Includes pre-wired 20A isolated ground duplex Style Line<sup>®</sup> receptacle.



#### 2X2 Flush FRPT, Two-Piece Units

Description	Catalog Number
Multi-Channel Through-Floor Fitting with (1) ¼ in. EMT stem with junction box for power and (2) ½ in. EMT stems for low voltage.	<b>PT2X2FIT</b>
	<p>Specifications:</p> <ul style="list-style-type: none"> <li>1 – 4 hour fire rating (1 – 3 hour for steel floor units and concrete topping, D900 Series Design)</li> <li>For 2¼ in. to 7 in. floor thickness</li> <li>UL installation spacing – minimum 2 ft. on center and not more than one per 65 sq. ft. of floor area</li> <li>Approved for use in the City of Chicago</li> </ul>

#### Service Fittings

Description	Color	Catalog Number	Description	Color/Material	Catalog Number
2X2 Service Fitting Non-metallic Cover/ Aluminum Flange	Black Gray	<b>PT2X2SFBL</b> <b>PT2X2SFGY</b>	2X2 Service Fitting Non-metallic Cover/ Brass Flange	Black/Brass Brass Finish/Brass	<b>PT2X2SFBR3</b> <b>PT2X2SFBR5</b>
<ul style="list-style-type: none"> <li>Pre-wired 20A Style Line<sup>®</sup> decorator receptacle and (2) Category 5e data jacks</li> <li>Painted aluminum flange</li> </ul>		<ul style="list-style-type: none"> <li>Pre-wired 20A Style Line<sup>®</sup> decorator receptacle and (2) Category 5e data jacks</li> <li>Solid brass flange</li> </ul>			

#### Accessories

Description	Color/Material	Catalog Number	Description	Color/Material	Catalog Number
Non-metallic Replacement Covers	Brass Finish Black Gray	<b>PT2X2CBRS</b> <b>PT2X2CBL</b> <b>PT2X2CGY</b>	<b>Closure Plug</b> Textured aluminum plug seals 3 in. core hole when FRPT is no longer required and is removed. Maintains the floor's 1 – 4 hour fire rating. UL Listed and CSA Certified.	Gray	<b>FRP250</b>
					

Note: See page P-31 for technical information.