

# MEDIUM BI-PIN FLUORESCENT BUTT-ON LAMPHOLDERS

## G13 Base



LINEAR FLUORESCENT

## Rapid Start Lampholders for T-8 and T-12 Lamps

**Cat. No. 395-00W:** Available in white only. Leads are #18 AWG 105°C AWM-TEW plastic insulated wire, 9" long, stripped 3/4". Wireways for flush wiring.

**Cat. No. 395-02W:** Same as Cat. No. 395-00W, but with mounting holes tapped #4-36. Two #4-36 screws by 1 3/32" long furnished.

**Cat. No. 389-00W:** Disconnect lampholder with blue disconnect lead. Paired with Cat. No. 395-00W.

**Cat. No. 434-00W:** Same construction and dimensions as No. 395, but with tempered spring steel snap-on clips. Leads may be brought out straight or from rear, for flush mounting. When rear wiring is used, suggested panel opening is 5/8" dia.

- 660W-600V • UL Listed E-5833 • CSA Certified LR-5863
- NOM Certified 057

## Plunger-Type


Molded white body. Copper alloy contacts. Leads, unless otherwise specified, will be one white, one black, No. 18 AWG 105°C AWM-TEW plastic insulated wire, 9" long, stripped 3/4". Two #6-32 screws furnished. Back-to-back lampholder dimensions 48 45/64", for 48" lamp.

**Cat. Nos. 458 & 459**


- 660W-600V • UL Listed E-5833 • CSA Certified LR-1863




SECTION A

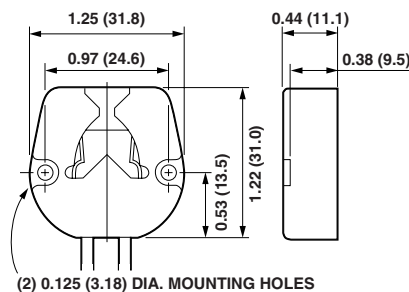


**Cat. No. 395-00W**



**Cat. No. 434-00W**

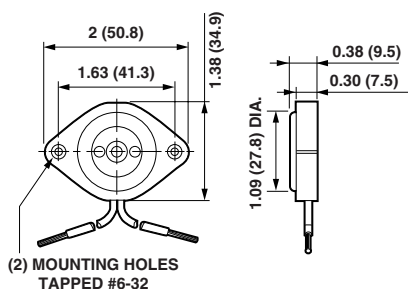

**Cat. No. 458**

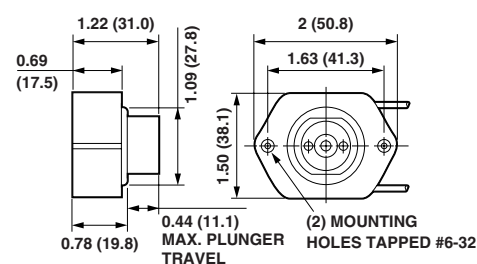

**Cat. No. 459**