


## Industrial Grade


### Locking Devices for the Entire Spectrum of Industrial Applications

Leviton's Industrial Grade Locking Devices are built to provide unparalleled quality and superior performance in the most severe industrial settings. Leviton combines the best materials available with superior production standards to produce a broad selection of Locking Devices of unmatched flexibility and dependability.

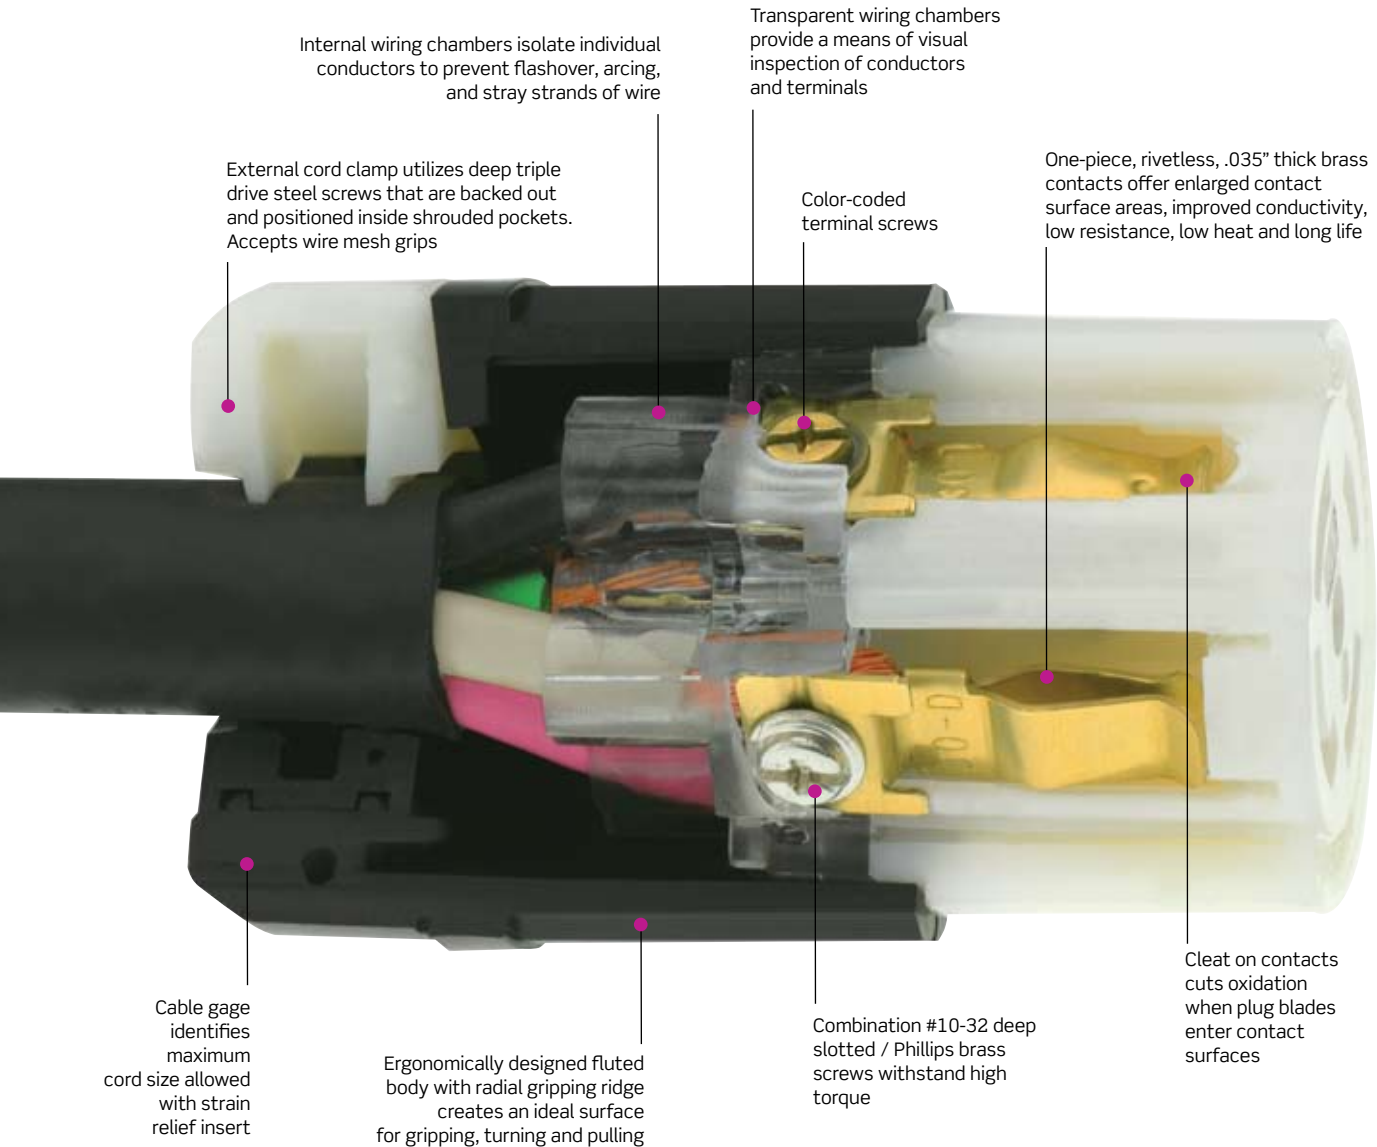

#### TESTING AND CODE COMPLIANCE

- UL 498 Listed
- Federal Specification WC-596 Listed
- CSA Specification C22.2 No. 42 Certified

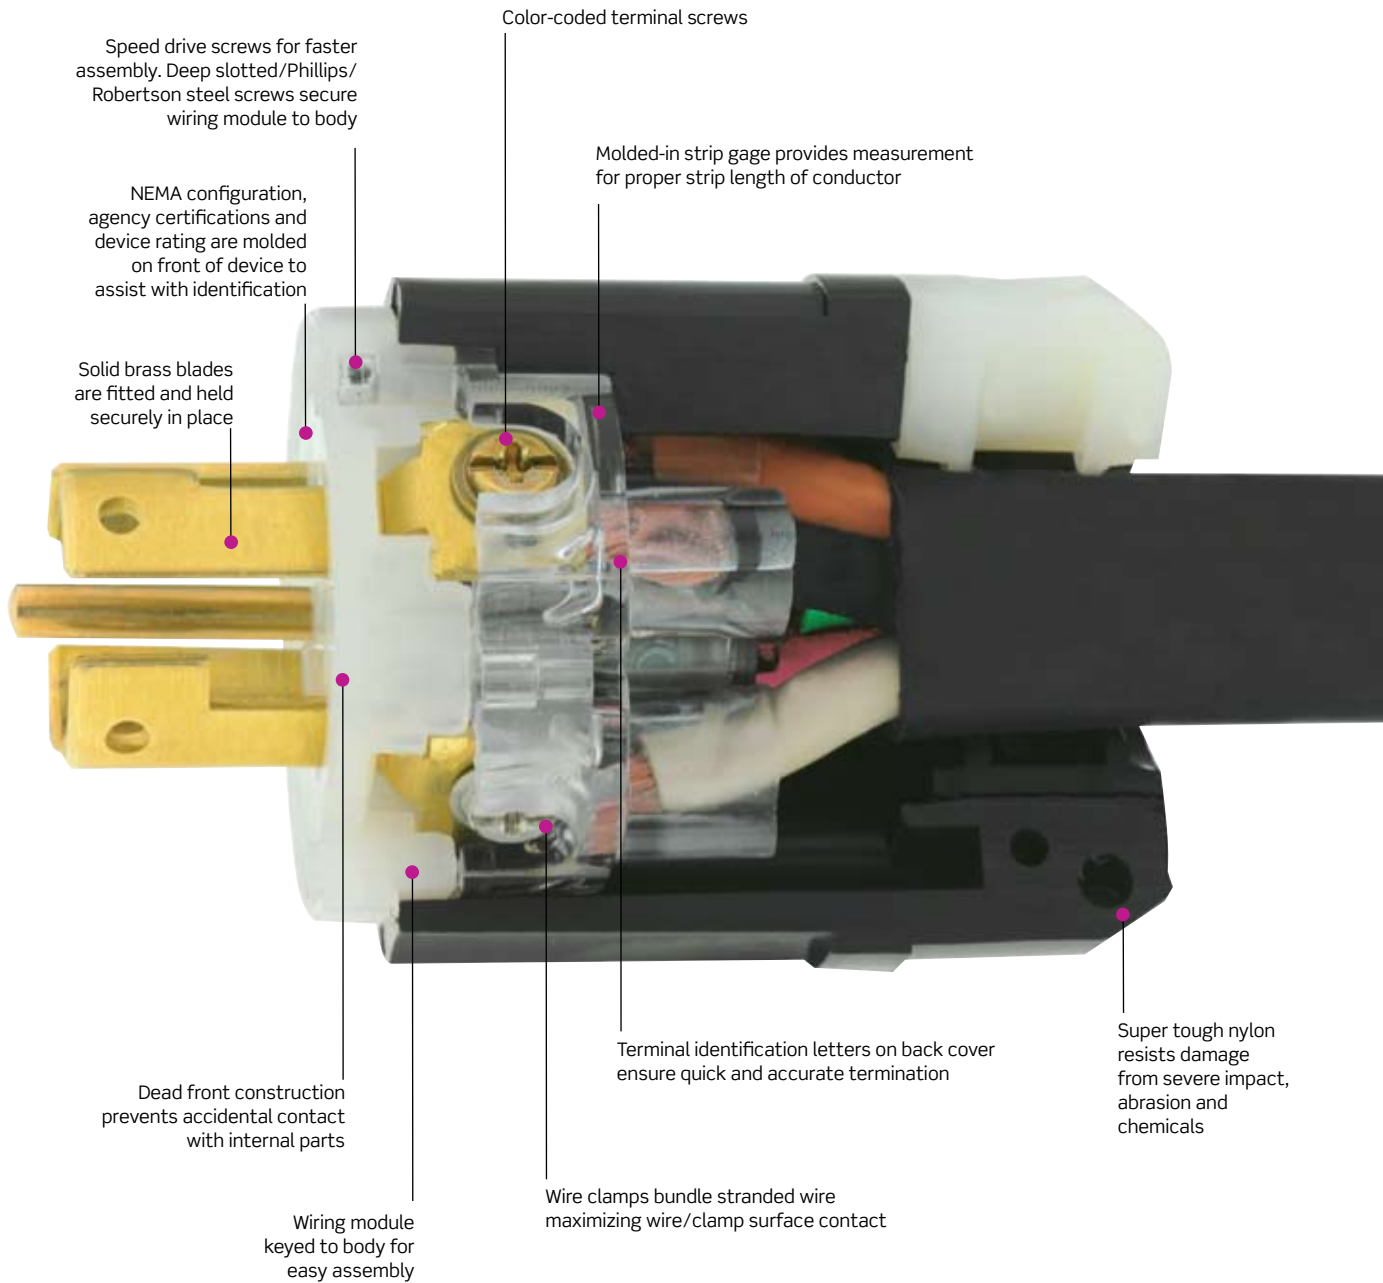

Shrouded pockets in cord clamp prevents slippage of screwdriver blade when tightening clamp screws.



Wire clamps move within individual chambers to provide positive clamp lock without cutting wire strands.



Captive terminal screws eliminate nuisance dropping and searching for missing screws.




Deep-funnelled, large wire wells guide conductors into termination position.

## Industrial Grade



### Locking Flush Receptacles

Engineered for maximum performance with a UL 94 V-0 Flammability Rating.

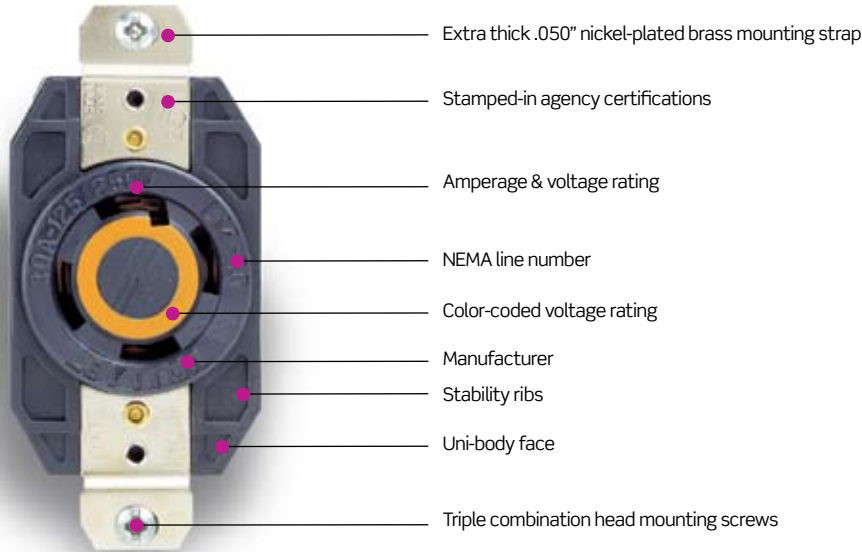


FLUSH RECEPTACLES-UL V-0 RATING

Color-Coded Voltage Ratings

125V	250V	277V AC
125/250V	3ø250V	3ø480V
	600V	

One-piece .040" thick brass, high-copper content contacts with nickel-plated clamp type terminals

Contacts deeply seated in thick walled faced



## Industrial Grade

## Integrated Power Inlets and Outlets with Weather-Resistant Covers

### Specifications and Features

- Engineered to IP 64 and NEMA 3R Protection Ratings
- Suitable for Industrial Indoor and Outdoor Use
- Gray, Glass-Filled Thermoplastic Cover and White, Nylon Device
- Glass-filled thermoplastic cover and plate provide outstanding impact resistance and durability
- Dual gaskets, one under plate and one under lid, for weather-resistant fit
- Stainless steel external hardware resists corrosive effects of moisture
- Large thumb-tab makes it easy to open cover with gloved hand
- Mounts to panels or FS/FD boxes
- UL Listed and CSA Certified for wet locations with cover closed
- Backed by a Limited Two-Year Warranty



4715-FWP

### 2-Pole, 3-Wire

Description	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet
<b>NEMA</b>				
	L5-15P	L5-15R	L6-15P	L6-15R
<b>Rating</b>	<b>15A-125V</b>		<b>15A-250V</b>	
Standard Wire Wells	4716-CWP	4715-CWP	4586-CWP	4585-CWP
Slots for Fork Terminals	4716-FWP	4715-FWP		

### TESTING AND CODE COMPLIANCE

- IP 64 Suitability Rating (protected against dust and splashing water)
- UL Listed (File #E-13393 Inlet) (File #E-13399 Outlet)
- CSA Certified (File #LR-16347)
- NOM Certified (#057)
- NEMA Type 3R Enclosure Rating when properly installed (protected against rain, sleet and damage from external ice formations)

### ELECTRICAL

Dielectric Voltage: Withstands 1500V for UL 498  
 Current Interr.: Full rated current  
 Temp. Rise: Max 30°C after 250 cycles at 200% of rated current


### MECHANICAL

Terminal I.D.: Brass-Hot, White-Neutral, Green-Grounding  
 Terminal Accom.: #18-#10 AWG  
 Product I.D.: Ratings are permanently stamped on device

### MATERIAL CHARACTERISTICS

Environmental: Flammability, Rated V2 per UL 94  
 Operating Temperature: -40°C to 60°C

## DIMENSIONS

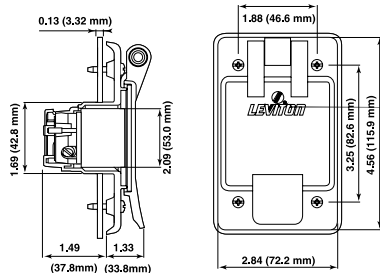

All Integrated Inlets and Outlets

### 20 AMP

#### 2-Pole, 3-Wire Grounding

Description	Cat. No. Plug	Cat. No. Connector/ Receptacle	Cat. No. Plug	Cat. No. Connector/ Receptacle	Cat. No. Plug	Cat. No. Connector/ Receptacle
NEMA						
	L5-20P	L5-20R	L6-20P	L6-20R	L7-20P	L7-20R
<b>Rating</b>	<b>20A-125V</b>		<b>20A-250V</b>		<b>20A-277V</b>	
Yellow Nylon Body and Cord Clamp	23CM-11	23CM-13				
V-O-MAX® Single Flush Receptacle		23CM-10		23CM-20		23CM-30

#### 3-Pole, 4-Wire Grounding

Description	Cat. No. Receptacle	Cat. No. Receptacle	Cat. No. Receptacle
NEMA			
	L14-20R	L15-20R	L16-20R
<b>Rating</b>	<b>20A-125V/250V</b>	<b>20A-3Ø 250V</b>	<b>20A-3Ø 480V</b>
V-O-MAX® Single Flush Receptacle	24CM-10	24CM-20	24CM-30

### 30 AMP

#### 2-Pole, 3-Wire Grounding

Description	Cat. No. Plug	Cat. No. Connector/ Receptacle	Cat. No. Plug	Cat. No. Connector/ Receptacle
NEMA				
	L5-30P	L5-30R	L6-30P	L6-30R
<b>Rating</b>	<b>30A-125V</b>		<b>30A-250V</b>	
Yellow Nylon Body and Cord Clamp	26CM-11	26CM-13	26CM-21	26CM-23
V-O-MAX® Single Flush Receptacle		26CM-10	26CM-20	

#### 3-Pole, 4-Wire Grounding

Description	Cat. No. Receptacle	Cat. No. Receptacle
NEMA		
	L14-30R	L15-30R
<b>Rating</b>	<b>30A-125V/250V</b>	<b>30A-3Ø 250V</b>
V-O-MAX® Single Flush Receptacle	27CM-10	27CM-20