

Harnessing Accessories

Several mounting styles available

- Clamp acts as a retainer during wire routing, and as a permanent clamp when desired



Cat. No.	Mounting Hole Size		Bundle Dia.		Max. Wire Width		Length		Std. Pkg.
	(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	
Mechanical-Locking Routing Clamps									
TC88	0.25	6.35	0.50	12.7	0.25	6.35	0.891	22.63	100
TC95			1.00	25.4	0.50	12.7	1.590	40.39	

Natural nylon colour.

For use in temperatures ranging from -40°F to 185°F (-40°C to 85°C).

How it works:

A projecting prong is simply pressed into a 1/4 in. hole, where it compresses and locks. The simple ratchet-type lock is released by moving the locking lever.

- Low installation cost
- Releasable
- For grouping wires in appliances, office equipment and other applications
- Adjustable, self-locking clip requires no tools for installation

Cat. No.	Mounting Hole Size		Max. Wire Bundle Dia.		Std. Pkg.
	(in.)	(mm)	(in.)	(mm)	
Harness Clips					
HCP438	0.250	6.35	0.375	9.53	1,000

Natural nylon colour.

For use in temperatures ranging from -40°F to 185°F (-40°C to 85°C).



- AC-loop
- Easy to add wires

Cat. No.	Mounting Method	Bundle Dia.		Maximum Wire Width		Std. Pkg.
		(in.)	(mm)	(in.)	(mm)	
Bundle-Retaining Clamp						
TC70	#10 screws	0.25	6.35	0.40	10.16	100
TC71		0.50	12.7			
TC72		0.75	19.05			
TC73		1.00	25.4			
TC74		1.50	38.10			

Rigid PVC construction.

For use in temperatures ranging from -40°F to 122°F (-40°C to 50°C).

- For use with round bundles



Cat. No.	Max. Tie Width		Size		Bundle Hole Size	Std. Pkg.
	(in.)	(mm)	(in.)	(mm)		
TY-RAP® Saddle Mounting Plate						
TC92	0.190	4.83	1/2-1-1/4	12.7-31.75	#6 screws	100

Natural nylon colour.

For use in temperatures ranging from -40°F to 185°F (-40°C to 85°C).

Wires are held 1/2 in. above work surface for easy tying


- Consist of a spring-loaded clip and an elastic bundle support
- Wires are inserted by snapping them through spring-loaded clips




Cat. No.	Fastener	Max. Wire Bundle Dia.		Width		Height		Std. Pkg.
		(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	
Wire-Bundle Retainers								
TC86	#6 screws	0.750	19.05	1.750	44.45	1.81	46.05	25
TC97		1.250	31.75	2.469	62.71	2.281	57.94	10

Hardened, nickel-plated, steel construction

- For wire harness board manufacturing

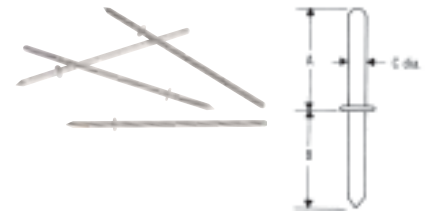

Cat. No.	A		B		C		Std. Pkg.
	(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	
Harness-Board Nails							
HBP-1	1.00	25.40	0.625	15.88	0.72	1.83	100
HBP112	1.50	38.10			0.82	2.08	
HBP2	2.00	50.80			0.92	2.34	
HBP212	2.50	63.50			0.105	2.67	
HBP3	3.00	76.20			0.120	3.05	



Offers extra support for wires and cables

- TC131 bulkhead mounting base can be installed from either side
- Ties are installed through the clamp on either side of the bulkhead



Cat. No.	Mounting Method	Tie Width Accom.		Maximum Width		Length		Std. Pkg.
		(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	
Bulkhead Bundle Support Feedthrough								
TC131	#6 screws	0.190	4.83	1.115	28.32	1.890	48.00	1,000

Natural nylon colour.

For use in temperatures ranging from -40°F to 185°F (-40°C to 85°C).

Keep wire bundles apart

Cat. No.	Max. Tie Width Accom.		Width		Length		Std. Pkg.
	(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	
Wire-Bundle Spacer							
TC5339	0.190	4.83	0.266	6.76	0.500	12.70	100

Natural nylon colour.

For use in temperatures ranging from -40°F to 185°F (-40°C to 85°C).

