
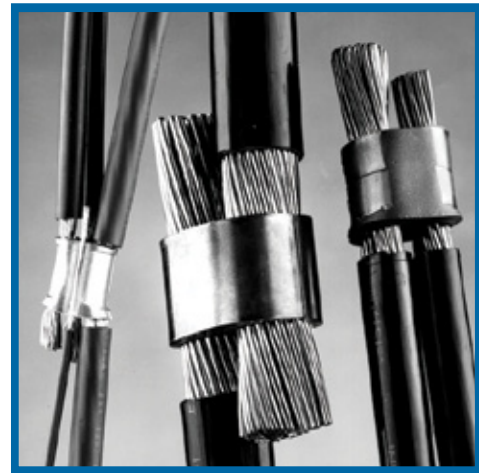


Copper H-Tap Connectors for Copper Conductor

Copper H-Taps — 600V Applications

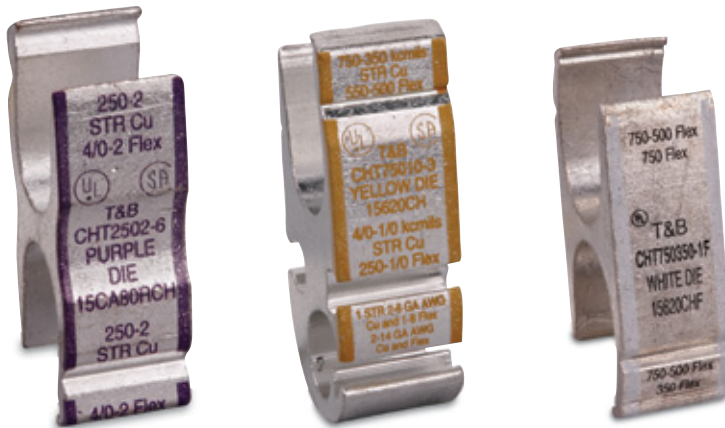

Connectors & Grounding — Blackburn® Compression Connectors Featuring the Color-Keyed® System

CAT. NO.	FIG. NO.	COLOR CODE	CONDUCTOR SIZE CODE (FLEX CABLE)				CRIMPING INFORMATION						
			MAIN	BRANCH 1	BRANCH 2	BRANCH 3	HYDRAULIC HEAD	INSTALLING DIE	# OF CRIMPS	COLOR CODE	DIE CODE	STRIP LENGTH	INSULATING COVERS
CHT750350-1F	1	WHITE	(750-500) (750) Flex Only	(750-500) (350) Flex Only	—	—	TBM15I	15620CH	1	WHITE	F	1 1/8"	HTC1000
CHT750350-2	2	YELLOW	750-500 (550-500)	750-500 (550-350)	—	—	TBM15I	15620CH	1	YELLOW	Z	1 3/8"	HTC500
CHT75010-3	9	YELLOW	750-350 (550-500)	4/0-1/0 (250-1/0)	1 Str. 2-6 (1-8)	2-14 (2-14)	TBM15I	15620CH	1	YELLOW	Z	1 1/8"	
CHT50040-4	2	BROWN	500-250 (350-4/0)	500-4/0 (350-4/0)	—	—	TBM15I	15612CH	2	BROWN	N	1 1/8"	
50010-5	3	BROWN	500-4/0 (350-4/0)	250-1/0 (4/0-1/0)	1 Str. 2-6 (1-8)	8-14 (8-14)	TBM15I	15612CH	2	BROWN	N	1 1/8"	HTC40
CHTCHT2502-6	2	PURPLE	250-2 (4/0-2)	250-2 (4/0-2)	—	—	TBM15I• TBM14M	15CA80RCH	1	PURPLE	80R	1 3/16"	
CHT25014-7	4	PURPLE	250-2 (4/0-2)	2-6 Str./Sol. (2-8)	8-14 (8-14)	—	TBM15I• TBM14M	15CA80RCH	1	PURPLE	80R	1 1/8"	
CHT250214-8	5	PURPLE	250-2 (4/0-2)	8-14 (8-14)	8-14 (8-14)	—	TBM15I• TBM14M	15CA80RCH	1	PURPLE	80R	1 1/8"	
CHT214-9	6	BROWN	2-6 Str./Sol. (2-8)	2-6 Str./Sol. (2-8)	8-14 (8-14)	8-14 (8-14)	TBM15I• TBM14M 13100A	15CA71RCH	3	BROWN	71R	7/8"	HTC2S
CHT814-10	7	GREEN	8-14 (8-14)	8-14 (8-14)	—	—	TBM15I• TBM14M 13100A	15CA37RCH	1	GREEN	37R	1/2"	
CHT75040-11	8	YELLOW	750 Str. (750-500)	350-4/0 Str. Cu. & Flex	—	—	TBM15I	15620CH	1	YELLOW	Z	1 1/8"	

• Requires adapter Cat. No. 15500-TB when used with hydraulic head TBM15I.

Material: Copper per ASTM designation B-124-55 Alloy 12

Available packaged with HTC series covers. Add "WC" to standard catalog number.

Tooling: pp. F-80-F-100

Die Selector Chart: p. F-101-F-104