
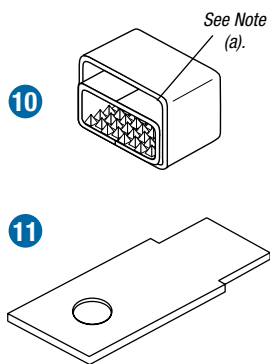


Dragon Tooth® Magnet Wire Termination System

Splices (continued)

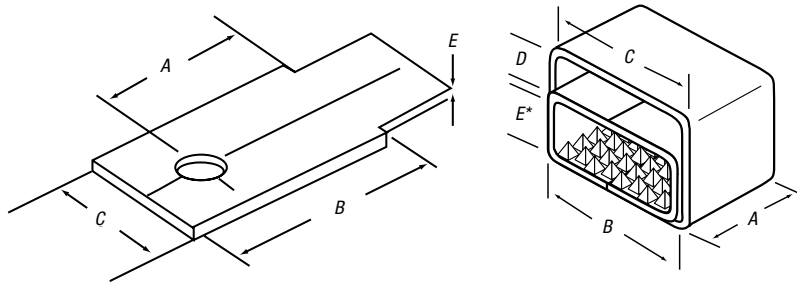

CAT. NO.	STUD SIZE	DIMENSIONS (IN.)					CIRCULAR MIL AREA	ROUND WIRE RANGE (AWG)	RECTANGULAR WIRE RANGE (IN.)		PKG. QTY.
		A	B	C	D	E			THICKNESS	WIDTH	
10 210214MT	—	.63	.63	.75	.25	.19*	20,000–105,000	5–13	Lower Half	250	
									Upper Half		
									.25 max .75 max.		
11 210MT14	1/4	1.00	1.44	.81	—	.08	5–13	For Conn	25		
11 210MT38	3/8	1.00	1.44	.81	—	.08	5–13	210214MT	25		
10 204210MT	—	.92	.94	1.03	.25	.25*	90,000–215,000	3–10	Lower Half	100	
									Upper Half		
									.25 max 1.03 max.		
11 204MT14	1/4	1.00	1.44	.91	—	.10	3–10	For Conn	25		
11 204MT38	3/8	1.00	1.44	.91	—	.10	3–10	204210MT	25		

(a) This space may be used for terminal tongue insert, stripped stranded copper wire, stripped copper magnet wire or left empty.

* Between teeth.

Note: Wire sizes and combinations shown have been tested to and meet or exceed Thomas & Betts specifications. Connectors may be suitable for other wire sizes or combinations. Thomas & Betts sells these connectors with the understanding that the user will perform necessary tests to determine their suitability for the intended purpose.

