


## Aluminum Lugs

General-purpose lugs for aluminum and copper terminations.

### Aluminum Four-Hole NEMA Lugs

- Dual-rated for use with aluminum and copper conductors
- Made from aluminum for high strength and high conductivity
- Prefilled with oxide inhibitor to prevent oxidation and keep out moisture
- All lugs marked with conductor sizes and die references for easy identification

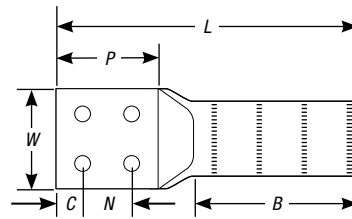

CAT. NO.	CONCENTRIC	ACSR	INSTALLING DIES	B	N	C	W	P	L
AL 1000-4N	1000	—	161, 302, 292, 319, 1¼	4 <sup>5</sup> / <sub>16</sub>	1¼	5 <sup>5</sup> / <sub>16</sub>	3	4	10
AL 14136 X	1033.5–1300	900–1113	161, 727, 352	7 <sup>1</sup> / <sub>16</sub>			3	4¼	13¾
AL 1033-4N	—	1033.5 (54/7)	34AH	6 <sup>5</sup> / <sub>16</sub>			3 <sup>3</sup> / <sub>16</sub>	3 <sup>1</sup> / <sub>16</sub>	12¾
AL 1250-4N	1250	—	161, 727, 352	4 <sup>5</sup> / <sub>16</sub>			3	3 <sup>3</sup> / <sub>16</sub>	10
AL 1272-4N	1272	—	161, 727, 352, 579	6 <sup>5</sup> / <sub>16</sub>			3	3 <sup>5</sup> / <sub>16</sub>	11¼
AL 1590-4N	1590	1272 (45/7)	728, 38AH, 189	8 <sup>3</sup> / <sub>16</sub>		3	3 <sup>5</sup> / <sub>16</sub>	13½	
AL 1750-4N	1750	—	214, 735, 40AH, 225	6 <sup>1</sup> / <sub>16</sub>		3½	3¾	12½	
AL 2000-4N	1700–2000	1510.5–1590	214, 735, 40AH, 225	6 <sup>1</sup> / <sub>16</sub>		7 <sup>5</sup> / <sub>16</sub>	3½	3¾	12½
AL 2300-4N	2250–2300	2167 (72/7)	44AH	11¾		4	4½	18½	
AL 2500-4N	2500	2156–2167	214	9 <sup>5</sup> / <sub>16</sub>		1 <sup>5</sup> / <sub>16</sub>	3½	4	15¾

**Note:** For tin-plating option, add “-TN” suffix to the catalog number.