

Aluminum Lugs


Lugs designed for general-purpose substation and switchyard equipment use.

Aluminum Two-Hole NEMA Lugs — Common Die Series

- Entire conductor range installed by three common dies to reduce your die inventory
- Dual-rated for use with aluminum and copper conductors
- Made from aluminum for high strength and high conductivity
- Prefilled with oxide inhibitor to prevent oxidation and keep out moisture
- All lugs marked with conductor sizes and die references for easy identification



SAB 500-N

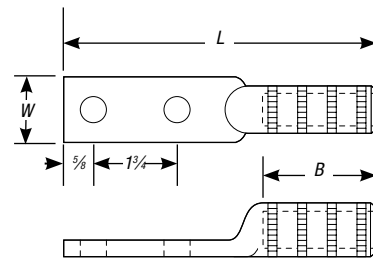

CAT. NO.	CONCENTRIC	COMPRESSED	COMPACT	ACSR	INSTALLING DIES	L	W	B
SAK 4 N	#4	—	—	—	TX, 76, 249, 840, 11A	5 ³ / ₄	1 ¹ / ₄	2
SAK 2 N	#1, #2	—	—	#2		5 ³ / ₄	1 ¹ / ₄	2
SAK 1/0 N	1/0	2/0	2/0	1/0		5 ³ / ₄	1 ¹ / ₄	2
SAK 300 N	—	—	350	—		6 ¹ / ₄	1 ¹ / ₄	2 ¹ / ₁₆
SAK 350 N	350	—	—	—		6 ¹ / ₄	1 ¹ / ₄	2 ¹ / ₁₆
SAB 3/0 N	3/0	—	—	3/0	96, 299, 655, 1 ¹ / ₈ -1, 13A	6 ³ / ₈	1 ¹ / ₂	2 ¹ / ₄
SAB 4/0 N	4/0, 250	—	—	4/0		6 ³ / ₈	1 ¹ / ₂	2 ¹ / ₄
SAB 250 N	266.8-300	—	—	266.8 (18/1)		6 ³ / ₈	1 ¹ / ₂	2 ¹ / ₄
SAB 500 N	477-500	—	600	397.5 (26/7), 30/7, 477 (18/1)		6 ³ / ₈	1 ¹ / ₄	2 ¹ / ₄
SAM 400 N	397.5-400	—	500	336.4 (30/7), 397.5 (18/1)		8 ²⁹ / ₆₄	1 ³ / ₄	3 ¹³ / ₁₆
SAM 556 N	500-556	—	—	477 (26/7), 556.5 (18/1)	106, 300, 317, 1 ¹ / ₁₆ , 14A, 15A	8 ³ / ₈	1 ³ / ₄	3 ²⁷ / ₃₂
SAM 600 N	600	—	—	—		8 ³ / ₈	1 ³ / ₄	3 ²⁷ / ₃₂