








Semiconductor Fuses

PSC - LR range - 83


Size	Catalog Number	Weight (g)	Packaging
	15 URD 83 TTF 0630		
	15 URD 83 TTF 0725		
	15 URD 83 TTF 0800		
	15 URD 83 TTF 0850		
	13 URD 83 TTF 0900		
	13 URD 83 TTF 0950		
	12,5 URD 83 TTF 1000		
	12,5 URD 83 TTF 1050		
83	12 URD 83 TTF 1100		
end contacts	11,5 URD 83 TTF 1250	1600	1
	11 URD 83 TTF 1400		
	9,5 URD 83 TTF 1550		
	9 URD 83 TTF 1800		
	8,5 URD 83 TTF 2000		
	8,5 URD 83 TTF 2200		
	7,5 URD 83 TTF 2400		
	14,5 URD 283 PLAF 0900		
	14,5 URD 283 PLAF 1100		
	12,5 URD 283 PLAF 1350		
	13,5 URD 283 PLAF 1450		
	13,5 URD 283 PLAF 1600		
	13,5 URD 283 PLAF 1700		
2x83*	13 URD 283 PLAF 1800		
double body	13 URD 283 PLAF 1900		
end contacts	11,5 URD 283 PLAF 2000	3350	1
	11,5 URD 283 PLAF 2100		
	11 URD 283 PLAF 2200		
	11 URD 283 PLAF 2500		
	10 URD 283 PLAF 2800		
	8,5 URD 283 PLAF 3100		
	8,5 URD 283 PLAF 3600		
	8 URD 283 PLAF 4000		
	8 URD 283 PLAF 4400		
	7 URD 283 PLAF 4800		

* Press pack available on request

- Microswitches : MC3E1-5N * - Ref. D310020
 MC3E1-5NBS * - Ref. E310021 Insulation voltage 1250 VAC - DC (data p 21)
 MC3E1-9NBS * - Ref. F310022
 MC3E1-5NET - Ref. L310027
 MCR3E1-5N * - Ref. G310023
 MCR3E1-5NBS * - Ref. P310030
 MCR3E1-9NBS * - Ref. H310024 Insulation voltage 2200 VAC - DC (data p 21)
 MCR3E1-5NET - Ref. Q310031

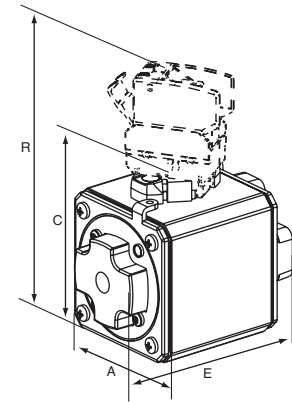

TTF
End contacts

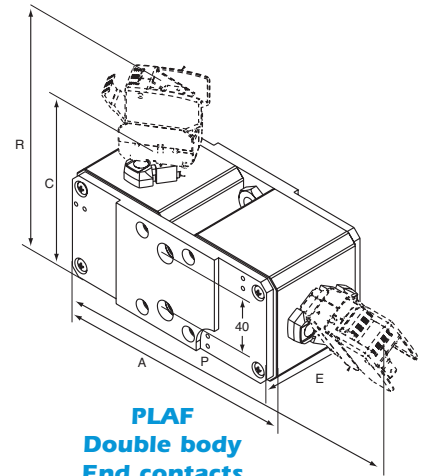

PLAF
Double body
End contacts

Threaded studs and microswitches ordered separately

Size	A	C ⁽¹⁾	D	E ^{+1,7}	d	G ^{+0,1}	P	R
83 TTF	73	88	-	96,5	M12	9	-	135
	2.9"	3.5"		3.8"		0.35"		5.31"
283 PLAF	180	88	-	84	M 10	15	227	135
	7.9"	3.5"		3.31"		19.32"	8.94"	5.31"

Dimension in mm and inches

See studs p. 23

See mounting torque and clamping force information p 23

(1) Trip indicator extended

(*) Pending