


UL Fuses 5x20

SU Medium time Lag

Complying with UL 198-G and CSA 22-2
Approvals: UL Listed E 90660 - CSA certified LR 49184.3

250 VAC
FROM 1,25 TO 12,5 A

Dimensions

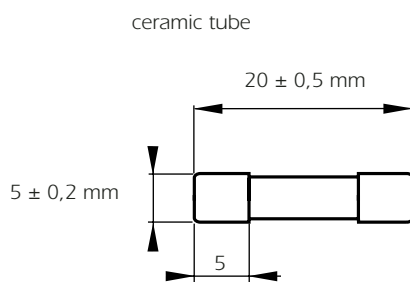

Max weight: 1.5 g



Basic Characteristics

Size	Rated Voltage	Rated Current	Breaking Capacity under 250 VAC	Max voltage drop	Designation	Reference Number	Catalog Number
mm	V	A	A	V			
5 x 20	250	1,25	10 000 Cos φ = 0,7 à 0,8	0,60	250V SU 1,25A 5x20	G087498	MI5SU25V1,25
		1,6		0,50	250V SU 1,60A 5x20	H087499	MI5SU25V1,6
		2		0,40	250V SU 2,00A 5x20	J087500	MI5SU25V2
		2,5		0,35	250V SU 2,50A 5x20	K087501	MI5SU25V2,5
		3,15		0,29	250V SU 3,15A 5x20	L087502	MI5SU25V3,15
		4		0,24	250V SU 4,00A 5x20	M087503	MI5SU25V4
		5		0,20	250V SU 5,00A 5x20	N087504	MI5SU25V5
		6,3		0,17	250V SU 6,30A 5x20	P087505	MI5SU25V6,3
		8		0,15	250V SU 8,00A 5x20	Q087506	MI5SU25V8
		10		0,14	250V SU 10,00A 5x20	R087507	MI5SU25V10
		12,5		0,12	250V SU 12,50A 5x20	S087508	MI5SU25V12,5