
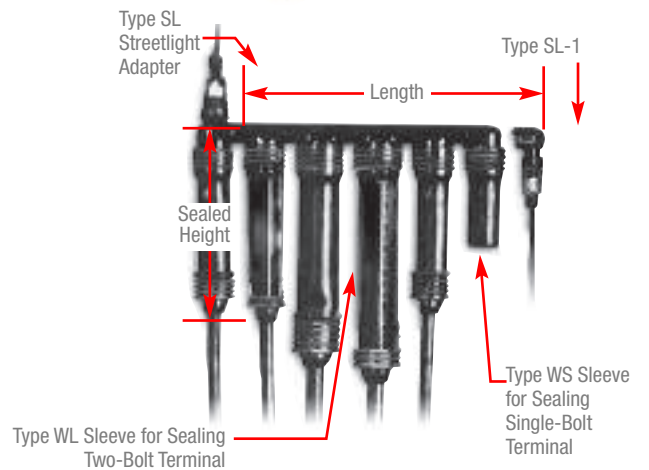


URD Multi-Port Bus Connectors and Covers

Flood-Seal™ Bus Connectors

Get the port and terminal options you need for pedestal, vault, handhole or direct-burial applications

- Waterproof O-ring sealing system. Type WS sleeve seals single-bolt terminals and Type WL sleeve seals two-bolt terminals.
- Mate with boss on compression lugs to prevent lugs from rotating
- Ensures that connectors are 100% watertight and molded correctly

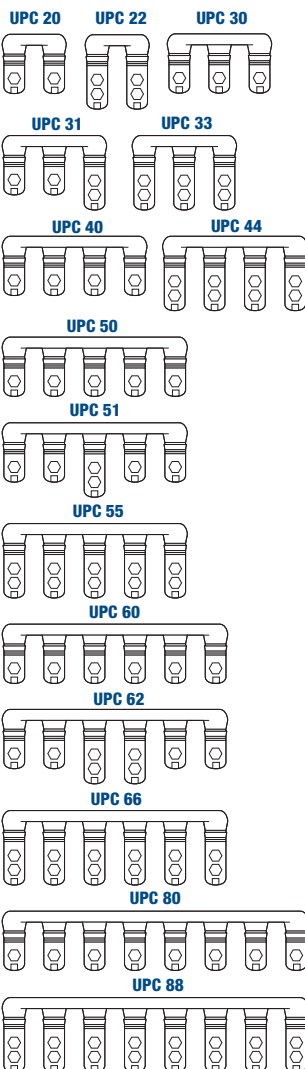

Flood-Seal™ Bus Connectors

Cat. No.	No. of Ports	2-Bolt Large Term.	1-Bolt Large Term.	Dimensions in. (mm)	
				Length	Height with Sleeve
UPC 20	2	0	2	3.3 (84)	6.5 (165)
UPC 22		2	0	3.8 (97)	8.8 (222)
UPC 30	3	0	3	5.2 (132)	6.5 (165)
UPC 31		1	2	5.3 (135)	8.8 (222)
UPC 33*		3	0	5.9 (151)	
UPC 40	4	0	4	7.1 (179)	6.5 (165)
UPC 41		1	3	7.3 (186)	8.8 (222)
UPC 42		2	2	7.6 (192)	
UPC 44*		4	0	8.1 (205)	
UPC 50		0	5	8.9 (227)	
UPC 51	5	1	4	9.2 (233)	8.8 (222)
UPC 52		2	3	9.4 (240)	
UPC 55*		5	0	10.2 (259)	
UPC 60		0	6	10.8 (248)	
UPC 61	6	1	5	11.1 (281)	8.8 (222)
UPC 62		2	4	11.3 (287)	
UPC 66*		6	0	12.3 (312)	
UPC 80	8	0	8	14.6 (370)	6.5 (165)
UPC 81		1	7	14.8 (376)	8.8 (222)
UPC 88*		8	0	16.6 (421)	

* For streetlight adapter option, add "-SL-1" suffix to catalogue number.
 Maximum size conductor — single-bolt: 350 kcmil; double-bolt: 500 kcmil.
 For compression lugs, see Section "C" of Power Connections and Grounding Catalogue.