

Ground Fault Products Features and Benefits

Circuit Guard® Heavy Duty, Hospital Grade, GFCI Duplex Receptacle

Impact resistant nylon face for abusive environments.


Pretensioned ground contacts for superior ground blade retention.

Tandem Modified By-Pass power contacts increase spring characteristics for greater contact forces and lower operating temperatures.

All glass PC board provides superior moisture immunity for longer life in humid environments.

Conformal coating on PC board for additional moisture immunity.

Feed through protection.

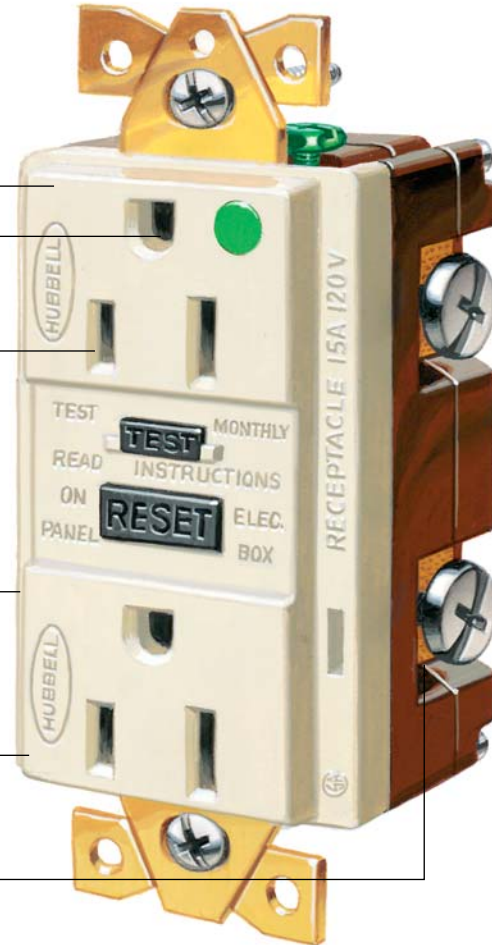

GF82001

Hubbell GFCI receptacles are built for quality, designed for easy installation and packaged for convenience. Multiple grades fulfill every need. Each type of receptacle is built from materials chosen for that particular application, and

packaged with the required hardware. All Circuit Guard GFCI receptacles are Class A, listed to UL standards 498 and 943 and certified to CSA standard CSA 22.2 No. 144. The operating temperature range is -35°C to +66°C.

Ground Fault Products 2 Pole 3 Wire Grounding

15 and 20 Ampere, 120 Volt AC

Straight Blade Heavy Duty, Industrial Specification Grade and Hospital Grade Duplex Receptacles




NEMA 5-15R
15A 125V
UL CSA



NEMA 5-20R
20A 125V
UL CSA


Circuit Guard® Heavy Duty Specification Grade GFCI Duplex Receptacles

Description	Color	Catalog Numbers	
Flush nylon face, side wired, multiple drive screws.	Brown	GF5262	GF5362
	Ivory	GF5262I	GF5362I
	Gray	GF5262GY	GF5362GY
	Red	GF5262R	GF5362R
	White	GF5262W	GF5362W

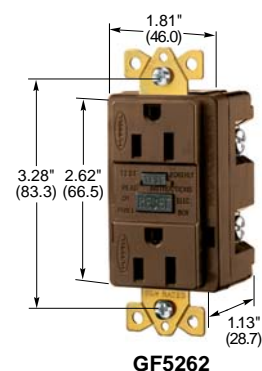

Circuit Guard Heavy Duty Hospital Grade, GFCI Duplex Receptacles

Description	Color	Catalog Numbers	
Flush nylon face, side wired, multiple drive screws.	Brown	GF8200	GF8300
	Ivory	GF8200I	GF8300I
	Gray	GF8200GY	GF8300GY
	Red	GF8200R	GF8300R
	White	GF8200W	GF8300W

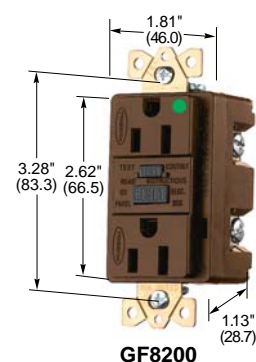

Note: GFCI type receptacles should not be used in critical care patient areas or for electrical life support equipment applications because of the possibility of power interruption.

All GFCI receptacles listed above are furnished with the proper color nylon wall plate, and in addition, an S-26 302/304 super stainless steel wall plate.

Specifications

Trip Level	4 to 6 mA.
Trip Time	.025 sec. nominal.
Frequency	60 Hz.
Voltage	120V AC +10% - 15%.
Maximum Interrupting Capacity	2000A.
Operating Temperature	-35°C to +66°C or -30°F to +150°F.
Maximum Humidity	95%.
Listings & Standards	Meets UL 498 for receptacles, UL 943 Class A for GFCIs UL File E41978. CSA Certified.
Codes	Meets all 2002 NEC requirements.