

Straight Blade Devices

4 Pole, 4 Wire Non-Grounding

20, 30, 50, and 60 Ampere 3Ø WYE 120/208 Volts
Receptacles and INSULGRIP® Plugs



IP20
SUITABILITY

4 Pole, 4 Wire Non-Grounding Receptacles and Plugs

Rating	Configuration	Description	Cord Dia.	Catalog No.
20A 3Ø 120/208V		Receptacle , black phenolic.		HBL7250
20A 3Ø 120/208V		Plug , nylon, angle 4-position.	.390-.775" (9.9-19.7)	HBL7251C
30A 3Ø 120/208V		Receptacle , black RTP*		HBL8330A
30A 3Ø 120/208V		Plug , nylon.	.625-1.310" (15.9-33.3)	HBL8331C
30A 3Ø 120/208V		Plug , nylon, angle 4-position.	.625-1.310" (15.9-33.3)	HBL8332C
50A 3Ø 120/208V		Receptacle , black RTP*		HBL8350A
50A 3Ø 120/208V		Plug , nylon.	.625-1.310" (15.9-33.3)	HBL8351C
50A 3Ø 120/208V		Plug , nylon, angle 4-position.	.625-1.310" (15.9-33.3)	HBL8352C
60A 3Ø 120/208V		Receptacle , black RTP*		HBL7301A
60A 3Ø 120/208V		Plug , nylon.	.625-1.310" (15.9-33.3)	HBL7303C
60A 3Ø 120/208V		Plug , nylon, angle 4-position.	.625-1.310" (15.9-33.3)	HBL7302C

Note: Horsepower ratings listed above are AC only.
Horsepower ratings are phase to phase, (208 to 240VAC).
*RTP is an abbreviation for reinforced thermoplastic polyester.



Accessories

Cover Plates

Description	Catalog Numbers
Steel 4" (101.6) sq. 1/2" (12.7) raised, 7.3 cubic inch capacity.	813
Steel 4 1/16" (119.0) sq. 1/2" (12.7) raised, 10.3 cubic inch capacity.	888
Stainless steel 302/304 smooth.	S701




IP44
SUITABILITY

Weatherproof Lift Cover Plates


Description	Catalog Numbers
Gray, thermoplastic, corrosion-resistant, for two-gang FS/FD box having plate mounting holes 3 1/4" x 3 3/4" on center.	HBL7777A
Same as above except yellow.	HBL77CM77A

PLUGOUT® Lockout Device NEW


Description	Catalog Number
Electrical plug lockout device.	HLD2




HBL7250




HBL8332C



HBL8330A



HBL8331C



HBL8332C

Catalog numbers shown on gray background will be discontinued when stock is exhausted.

Straight Blade Devices Accessories

For 4 Wire 30, 50 and 60 Ampere, 125/250 Volts and 3Ø 277V AC



Wall Plates, 2-Gang

Description	Catalog No.
Stainless steel 302/304, satin, smooth.	S701
Brass .040" (1.0), brushed, smooth.	B701



S701



1/2" (12.7) Raised Steel Covers

Description	Catalog No.
4" (101.6) square, 7.3 cubic inch (119.6cm ³) capacity.	813
4 ¹¹ / ₁₆ " (119.1) square, 10.3 cubic inch (168.8cm ³) capacity.	888



888



IP44
SUITABILITY

Weatherproof Lift Cover Plates

Description	Catalog No.
Polycarbonate, gray, lift cover plate. Will fit FS/FD boxes having plate mounting hole 3.25" x 3.75" (82.5 x 95.2), centers. Only for receptacles listed on pages A-38 and A-39 with suffix "A".	HBL7777A
Same as above except yellow.	HBL77CM77A




HBL7777A

PLUGOUT® Device NEW

Description	Catalog No.
Electrical plug lockout device for 30, 50 and 60A devices.	HLD2

Note: See Section G for complete details on lockout devices.

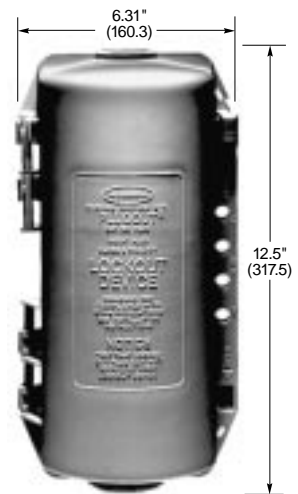

HLD2