

**30A, 125V,
2 Pole, 3 Wire Grounding,
Receptacles and Plugs**

IP20
SUITABILITY




**30A 125V
NEMA 5-30R
UL CSA
2 HP**



**30A 125V
NEMA 5-30P
UL CSA
2 HP**

Description	Cord Diameter	Catalog Number
Receptacle, black RTP.	-	HBL9308
Receptacle, orange, isolated ground ^A .	-	IG9308
Plug, nylon, angle, 4-position.	.625"-1.187" (15.9-30.1)	HBL9309*



**30A, 250V,
2 Pole, 3 Wire Grounding,
Receptacles and Plugs**

IP20
SUITABILITY




**30A 250V
NEMA 6-30R
UL CSA
2 HP**



**30A 250V
NEMA 6-30P
UL CSA
2 HP**

Description	Cord Diameter	Catalog Number
Receptacle, black RTP.	-	HBL9330
Receptacle, orange, isolated ground ^A .	-	IG9330
Plug, nylon, angle, 4-position	.625"-1.187" (15.9-30.1)	HBL9331*



**30A, 277V AC,
2 Pole, 3 Wire Grounding,
Receptacles and Plugs**

IP20
SUITABILITY



**30A 277V AC
NEMA 7-30R
UL CSA
3 HP**



**30A 277V AC
NEMA 7-30P
UL CSA
3 HP**

Description	Cord Diameter	Catalog Number
Receptacle, black RTP.	-	HBL9315
Plug, nylon, angle, 4-position.	.625"-1.187" (15.9-30.1)	HBL9319*

UL
**30A, 125/250V,
3 Pole, 3 Wire Non-Grounding,
Receptacles and Plugs**

IP20
SUITABILITY



**30A 125/250V
NEMA 10-30R
UL Listed
2(2) HP**



**30A 125/250V
NEMA 10-30P
UL Listed
2(2) HP**

Description	Cord Diameter	Catalog Number
Receptacle, black phenolic.	-	HBL9350
Receptacle, surface mount aluminum housing.	-	HBL9395
Plug, Insulgrip®, nylon.	.625"-1.00" (15.9-25.4)	HBL9337C
Plug, nylon, angle, 4-position.	.625"-1.187" (15.9-30.1)	HBL9333






Note: RTP is an abbreviation for reinforced thermoplastic polyester.

^ASee section M for additional information on isolated ground devices.

*Not Fed. Spec. Listed.

See page A-48 for accessories.

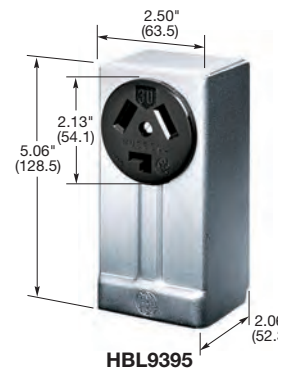

Dimensions in Inches (mm)