

### Mural® Decora® Digital

#### Specifications and Features

##### Digital Controls

- Provides single pole, 3-way or multi-location full range dimming when used with MS00R or MSE0R remotes
- Streamlined, popular Decora styling complements interiors and is compatible with other Decora devices
- Decora rocker action provides crisp actuation and minimal travel
- Digital circuitry provides soft ON/fade OFF switching that extends lamp life
- Compatible with Decora Plus™ screwless wallplates and Decora wallplates
- Coordinates with Decora Home Controls
- Green LED locator illuminates when lights are OFF
- Color change kits are available to allow fast color changeover and simplify stocking inventory
- Protected memory and voltage compensation maintain light levels after power outages and during minor power fluctuations
- Built-in radio/TV interference filter
- Air-gap switch completely disconnects power to unit for bulb changing or removal from service
- Limited Five-Year Warranty

##### Scene Enhancement Products

- 2-way repeater provides scene control communication link between branch circuits. 1-way repeater allows the creation of separate scene control zones
- Limited Five-Year Warranty

Mural Lighting and Fan Speed Controls are polarity sensitive devices. Always follow the wiring instructions included with each device.


### MURAL DECORA DIGITAL CONTROLS FOR SINGLE POLE, 3-WAY OR MORE APPLICATIONS

#### Dimmers

Description	Rating	Cat. No.	Color
Incandescent Dimmer with LED locator and brightness display	600W-120VAC	MDI06-1L	W, I, A
Incandescent Dimmer with LED locator and brightness display	1000W-120VAC	MDI10-1L	W, I, A
Magnetic Low Voltage Dimmer with LED locator and brightness display	600VA (450W)-120VAC	MDM06-1L	W, I, A
Magnetic Low Voltage Dimmer with LED locator and brightness display	1000VA (800W)-120VAC	MDM10-1L	W, I, A
Electronic Low Voltage Dimmer with LED locator and brightness display, neutral required	350VA (280W)-120VAC	MDE03-1L	W
Coordinating Remote Unit to Dimmers/Fan Speed Controls for 3-way or up to 10 locations, no LED	No load rating - 120VAC	MS00R-10	W, I, A
Coordinating Remote Unit to Electronic Low Voltage Dimmer for 3-way or up to 10 locations, no LED, neutral required	No load rating - 120VAC	MSE0R-10	W

#### Fan Speed Control

Description	Rating	Cat. No.	Color
Quiet Fan Speed Control with LED locator and brightness display; neutral required	1.5A-120VAC	MDF01-1L	W

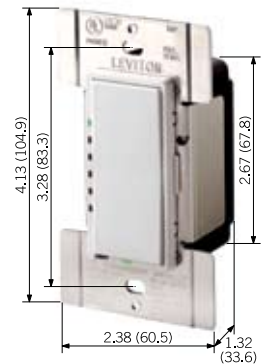

MDI06-1LW