


Commercial Grade

Commercial Spec Grade Receptacles

Leviton offers a large selection of 15 and 20 Amp Commercial Spec Grade receptacles, including Decora® devices available in a wide variety of colors, wiring options and other features. Leviton's Commercial Receptacles are manufactured to withstand the demands of commercial and institutional applications. These commercial receptacles provide long-lasting service life and are a cost-saving alternative to the industrial devices.

Features and Benefits

- Manufactured to withstand the demands of commercial and institutional applications
- Heavy-Duty Brass Power contacts for maximum conductivity and plug retention
- Shallow design for maximum wiring room in box
- UL Listed 498 (UL File #E-13399)
- CSA Certified where applicable (CSA File #LR-406)
- NOM Certified (#057)
- Meets NEMA WD-1 & 6, and ANSI standards
- Backed by a Limited Ten-Year Warranty
- All commercial side-wired receptacles have #8-32 triple combination head terminal screws
- All commercial back and side-wired receptacles have #10-32 triple combination head terminal screws

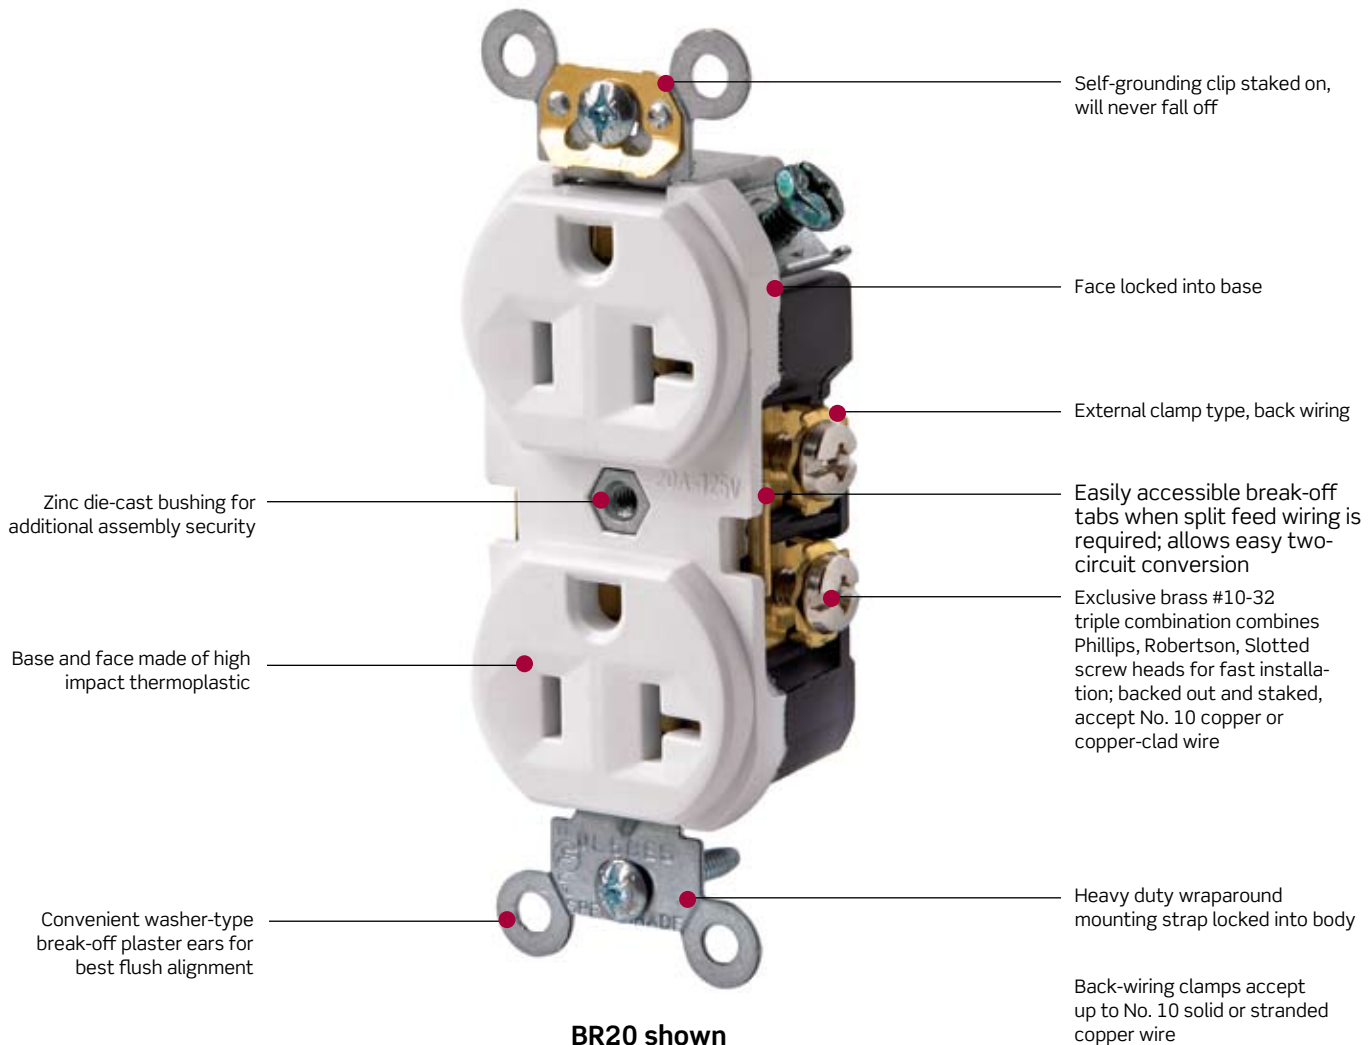

BR20 shown



Related Products

Leviton offers a complete line of Commercial Grade SmartLockPro® GFCI receptacles.





See page 153 for more information.


Commercial Spec Grade

Specifications and Features


- Large-head terminal screws, backed out and staked, accept No. 10 copper or copper-clad wire
- Heavy-Duty brass power contacts for maximum conductivity and plug retention
- Heavy-gauge, rust-resistant steel mounting strap
- Shallow design for maximum wiring room in box
- Convenient washer-type break-off plaster ears for best flush alignment
- Captive mounting screws for fast installation where applicable

Side Wired, Self-Grounding  

Description	Color	Cat. No.	Cat. No.	Cat. No.	Cat. No.
NEMA		 5-15R	 6-15R	 5-20R	 6-20R
Rating		15A-125V	15A-250V	20A-125V	20A-250V
Duplex, Tamper Resistant	White	CR15S-GW	—	—	—
	Ivory	CR15S-GI	—	—	—
	Light Almond	CR15S-GT	—	—	—
	Grey	CR15S-GG	—	—	—
	Brown	CR15S-G	—	—	—
Duplex, Tamper and Weather Resistant	White	TWR15-W	—	TWR20-W	—
	Gray	TWR15-GY	—	TWR20-GY	—
Duplex	White	CR15-W	—	CR20-W	5822-W
	Ivory	CR15-I	5028-I	CR20-I	5822-I
	Light Almond	CR15-T	—	CR20-T	—
	Grey	CR15-GY	—	CR20-GY	—
	Black	CR15-E	—	CR20-E	—
	Brown	CR15	5028	CR20	5822
Duplex, Smooth Face	White	CR015-W	—	CR020-W	—
	Ivory	CR015-I	—	CR020-I	—
	Grey	CR015-GY	—	CR020-GY	—
	Black	CR015-E	—	CR020-E	—
	Brown	CR015	—	CR020	—
Duplex, on 4" Cover*	Zinc Plated	5042	—	—	—
Duplex, with Pigtail Leads*	White	5040-W	—	5340-W	—
	Ivory	5040-I	—	5340-I	—
	Grey	—	—	5340-GY	—
	Brown	—	—	5340	—
Duplex, with 6" wire leads, no ground lead and self-grounding clip	White	5040-CW	—	5340-CW	—
	Ivory	5040-CI	—	5340-CI	—
	Grey	5040-CG	—	5340-CG	—

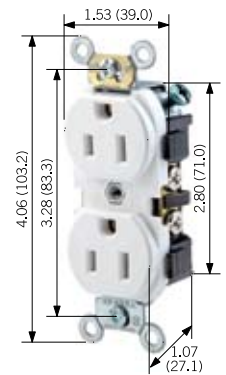

CR15-W

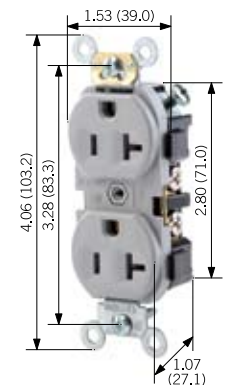

CR20-GY

CSA certified except where indicated by *

Cross Reference to Power Devices Section for Side Wired, Non-Grounding Single (Double Swipe) Receptacle 5032 with matching plug 9151-N.

Continued On Next Page >