


VL Molded Case Circuit Breakers

Ground Sensors & Electronic Accessories

Selection



Description

Neutral Current Transformer (Ground Sensor, N-pole)

Neutral = 35/60A
 Neutral = 100A
 Neutral = 150A
 Neutral = 250A
 Neutral = 400A
 Neutral = 600A
 Neutral = 800A
 Neutral = 1000/1200A
 Neutral = 1600A


For DG Frame
150 A

For FG Frame
250 A

Catalog Number

Catalog Number

NGSD060	—
NGSF100	NGSF100
NGSF150	NGSF150
—	NGSJ250
—	—
—	—
—	—
—	—
—	—
—	—



Power Stick

Spare Flat Cable

Communications & Electronics

Power Stick - Hand held, battery operated power supply for LCD trip units. (Requires two 9V batteries.) Trip testing for both 555 & 586 trip units.

Spare flat cable for Power Stick.

COM20 Profibus Communications Module with ZSI for electronic trip units (order cable separately)

COM21 Modbus Communications Module with ZSI for electronic trip units (order cable separately)

Cable for COM20/21, 1.5 m (4.9 ft)

Cable for COM20/21, 3.0 m (9.8 ft)

Addressing Plug - assigns a field bus address without a PC by plugging into COM20/21

EPSP18V

EPSP18V

COMPCA

COMPCA

COMPRO20

COMPRO20

COMMOD21

COMMOD21

COMKIT3

COMKIT3

COMKIT6

COMKIT6


3UF79100AA000

3UF79100AA000



Com20 Profibus & Com21 Modbus Communications Module

Door Cutouts & Extensions

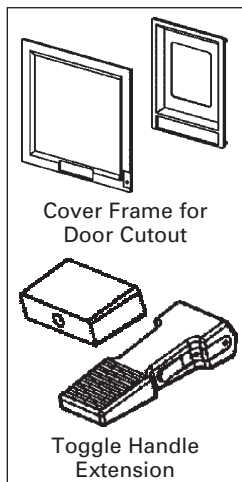

Cover Frame for Door Cutout

Toggle Handle Extension

Cover Frame for Door Cutout

For fixed or plug-in mounted circuit breakers. (IP30)
 2-Pole & 3-Pole

For breakers with stored energy operator. (IP40)

Circuit-breaker draw-out mounted and toggle handle operated. Kit includes cover frame (bezel) and escutcheon as needed. (IP40) (not for use with rotary handle or stored energy operator)

Toggle Handle Extension

For spare or replacement. (One is included with each NG - PG frame.)

BZLF3

BZLF3

BZLFRHSE

BZLFRHSE

BZLFBDC

BZLFBDC

—

—