




ADJUSTABLE PIPE CLAMP




Nominal Pipe Size		Cat. No.	Pipe O.D. Range		Design Load		Max. Torque	
in.	mm		in.	mm	lb.	N	in.-lb.	N-m
1/2 to 3/4	15-20	NM-SAPC050	75 to 1.05	19 to 28	75	.33	15	1.69
1 to 1-1/2	5-40	NM-SAPC100	1.05 to 1.90	29 to 48	150	.67	22	2.48
1-1/2 to 2-1/2	40-65	NM-SAPC112	1.90 to 2.87	48 to 73	150	.67	22	2.48
2-1/2 to 3-1/2	65-90	NM-SAPC212	2.87 to 4.0	73 to 101	150	.67	22	2.48

Safety Factor of 3 on Design Load.

Not recommended for vertical installation without additional supports

RIGID PIPE CLAMP




Nominal Pipe Size		Cat. No.	Design Load		Max. Torque	
in.	mm		lb.	N	in.-lb.	N-m
1/2	15	NM-SRPC050	300	1.33	10	1.13
3/4	20	NM-SRPC075	300	1.33	10	1.13
1	25	NM-SRPC100	300	1.33	10	1.13
1-1/4	32	NM-SRPC114	300	1.33	10	1.13
1-1/2	40	NM-SRPC112	300	1.33	10	1.13
2	50	NM-SRPC200	300	1.33	10	1.13
2-1/2	65	NM-SRPC212	300	1.33	10	1.13
3	80	NM-SRPC300	300	1.33	10	1.13
3-1/2	90	NM-SRPC312	300	1.33	10	1.13
4	100	NM-SRPC400	300	1.33	10	1.13

Safety Factor of 3 on Design Load.

Not recommended for vertical installation without additional supports

CONDUIT SWIVEL CLAMP

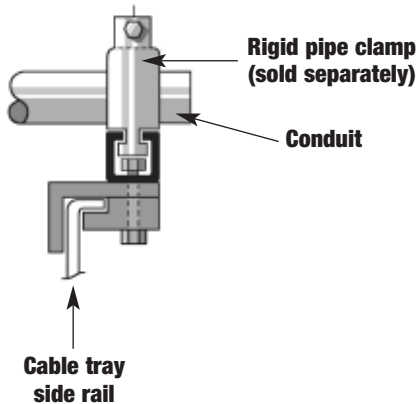

Catalogue No.

NM-SCSC-(CTD)

Cable Tray Designation (CTD) required (Ex. 6CP Series designates 6" deep polyester resin).
Pipe Clamps are a separate order item.