


Ty-Rap® High-Performance Stainless Steel Cable Ties

Pre-assembled for single or double wrapping.

Ty-Rap® Free-End Stainless Steel Clamps

- 201 grade stainless steel construction
- Double-wrapped clamps provide extra strength
- Available in various lengths, widths and thicknesses

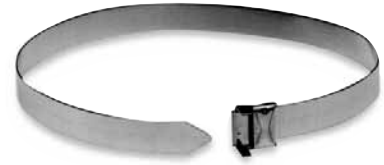

| CAT. NO. | MAX. DIA. ONCE AROUND IN/MM | MAX. DIA. TWICE AROUND IN/MM | LENGTH IN/MM | TENSILE STRENGTH SINGLE WRAP LBS/N | BAND WIDTH IN/MM | BAND THICKNESS IN/MM | WEIGHT LBS/KG | STD. PKG. QTY. |
|-----------|-----------------------------|------------------------------|--------------|------------------------------------|------------------|----------------------|---------------|----------------|
| SSH10-250 | 2/50 | — | 10/25 | 450/2002 | .25/6.35 | .02/.51 | 2.2/1.00 | 100 |
| SSH16-250 | 3.5/88 | 1.5/38 | 16/40 | 450/2002 | .25/6.35 | .02/.51 | 3.1/1.41 | 100 |
| SSH16-375 | 3.5/88 | 1.5/38 | 16/40 | 900/4003 | .38/9.53 | .03/.63 | 6.2/2.81 | 100 |
| SSH18-500 | 4/101 | 2/50 | 18/45 | 1,400/6228 | .5/12.70 | .03/.76 | 10.5/4.76 | 100 |
| SSH19-250 | 5/127 | 2.5/63 | 19/48 | 450/2002 | .25/6.35 | .02/.51 | 3.5/1.59 | 100 |
| SSH21-625 | 5/127 | 2.5/63 | 21/53 | 1,700/7562 | .63/15.88 | .03/.76 | 15.1/6.85 | 100 |
| SSH24-750 | 6/152 | 3/76 | 24/60 | 2,000/8896 | .75/19.05 | .03/.76 | 10.9/4.94 | 50 |
| SSH27-250 | 7/177 | 3.5/88 | 27/68 | 450/2002 | .25/6.35 | .02/.51 | 4.6/2.09 | 100 |
| SSH31-500 | 8/203 | 4/101 | 31/78 | 1,400/6228 | .5/12.70 | .03/.76 | 4.7/2.13 | 25 |
| SSH34-250 | 9/228 | 4.5/114 | 34/86 | 450/2002 | .25/6.35 | .02/.51 | 5.6/2.54 | 100 |
| SSH37-750 | 10/254 | 5/127 | 37/93 | 2,000/8896 | .75/19.05 | .03/.76 | 7.6/3.45 | 25 |
| SSH44-375 | 12/304 | 6/152 | 44/112 | 900/4003 | .38/9.53 | .03/.76 | 3.6/1.69 | 25 |
| SSH50-750 | 14/355 | 7/177 | 50/127 | 2,000/8896 | .75/19.05 | .03/.76 | 9.7/4.40 | 25 |
| SSH56-625 | 16/406 | 8/203 | 56/142 | 1,700/7562 | .63/15.88 | .03/.76 | 9.0/4.08 | 25 |
| SSH62-750 | 18/457 | 9/228 | 62/157 | 2,000/8896 | .75/19.05 | .03/.76 | 11.6/5.26 | 25 |
| SSH69-625 | 20/508 | 10/254 | 69/175 | 1,700/7562 | .63/15.88 | .00/.76 | 10.7/4.86 | 25 |

Type 201 Stainless Steel

Other Free-End Clamp sizes and metals are available on special order.

Boiler rooms, shipyards, or off-shore oil platforms — a match for any severe environment!

Ty-Rap® Stainless Steel Strap Cable Ties

- Stainless steel strap cable ties have been designed for high-temperature applications and for use in areas of harsh, corrosive environments
- Rated at 200-lb. tensile strength
- Smooth edges protect both the cable insulation and the installer



| CAT. NO. | BODY WIDTH IN/MM | LENGTH IN/MM | MAX. WIRE BUNDLE DIA. IN/MM | TENSILE STRENGTH LBS/N | STD. PKG. QTY. |
|----------|------------------|--------------|-----------------------------|------------------------|----------------|
| TYS8 | .31/7.87 | 10.65/270.51 | 2/50.80 | 200/889.60 | 100 |
| TYS14 | .31/7.87 | 14.65/372.11 | 4/101.60 | 200/889.60 | 50 |
| TYS22 | .31/7.87 | 22.65/575.31 | 6/152.40 | 200/889.60 | 50 |
| TYS28 | .31/7.87 | 28.65/727.71 | 8/203.20 | 200/889.60 | 50 |

Note: Use WT3S Tool for tensioning

Cannot be coated with any covering material

Made of 316 stainless steel