

WORK SURFACE MODULAR POWER



Wiremold® Work Surface Modular Power Kits (WSMP) make rearranging meeting rooms fast, easy, and safe by providing both under table power and cable management in one package.



CODE REFERENCE


UL Listed :
 Manufactured Wiring Systems
 File E51105 Guide: QQVX
 CSA Certified File 257563
 Cord Ended Units are UL & cUL Listed
 Furniture Feed Distribution Units
 File: E349493 Guide: IYNC

Work Surface Modular Power Part Number Configurator

WS	ME	D	TC	72	SL	SK	-2
Work Surface Series = WS	Power: Modular Power Enhanced Portal = ME Modular Power Standard Unit = MP Corder Power Enhanced Unit = CE	Data: 2 Keystone Openings = D	Style: Under Table (No Flange) = UT Through Table (Contour Flange) = TC	Table Size: 72" = 72 60" = 60	Portal Color: Black = BK Silver = SL	Kit Config.: Single Portal Kit = SL Double Portal Kit = DK	Wiring Config.: Portals wired for circuit 2 = 2 Portals wired for circuit 1 = Blank

NOTE: Part Number Configurator can be used both to identify stock product configurations and also to request custom configurations from the factory. Consult the factory for more information.

Work Surface Modular Power Kits Ordering Information

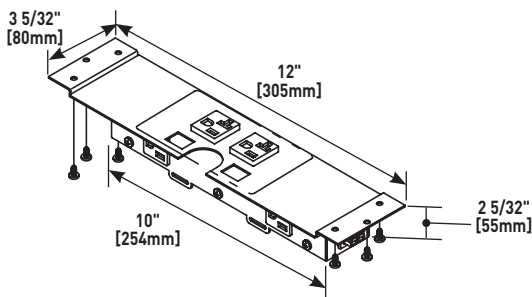

NOTE: Kits include portal(s), flange(s) cables and mounting clips. Enhanced Portal Kit shown.



Shown with existing table grommet (supplied by others).

NOTE: Kit configurations assume there is 1/2" of cabling on each side of the table to make the table-to-table connections.

NOTE: Cable and Connectors are wired for two circuits. Portals are either Circuit 1 or Circuit 2. (They pass through the other circuit.)

WORK SURFACE MODULAR POWER

Ordering Information

Work Surface Modular Power Components Ordering Information

WSMPHWSC72 Hardwire Starter Cable



72", multi-circuit, black starter cable with cover with 12" leads on one end and a female connector on the other.

WSMP-QD Quick Disconnect Connector



Male connector in decorator sized plate with 18" leads. (Decorator faceplate not included.)

WSMPQDSFF Quick Disconnect Insert & Cable



Single connector with 18" leads in decorator footprint for wall or floor outlets with 72" female/female interconnecting cable and cable cover.

WSMP-T T Connector



MFM connectors for starting power runs from the center of a table or auditorium seating applications.

WSMPCMM12 Connector Cable



12" MM connectorized cable to accommodate "U" or cornered runs.