

PVC-Coated Conduit Bodies and Fittings



In bulkhead and through-bulkhead styles!

Ocal® PVC-Coated Bulkhead Fittings






STTB2-G Bulkhead Fitting

STTTB2-G Through-Bulkhead Fitting

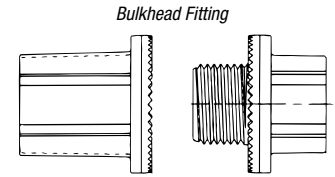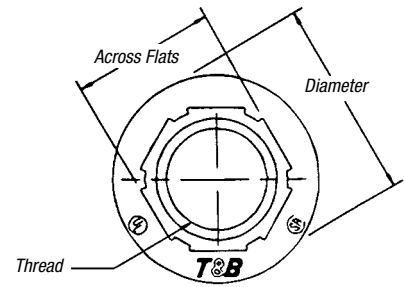

Through-Bulkhead Fitting

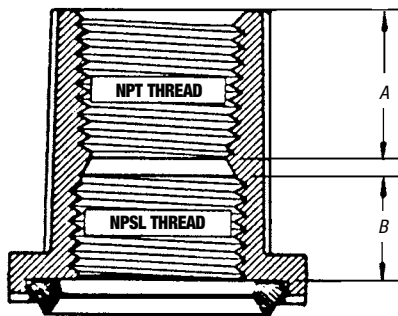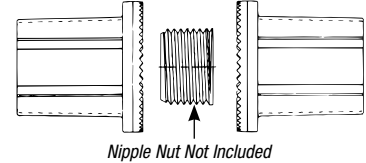

- Zinc body and locknut with thermoplastic insulating throat and nitrile sealing ring
- Nominal .040" (40 mil) PVC coating bonded to exterior — in blue, white, gray or custom colors
- Pressure-sealing sleeves protect your connections

Cat. No.	Color
STTB1 - _	
_ = space for color identifier	
G = Gray	
W = White	
B = Blue	
Custom colors also available.	

BULKHEAD FITTING CAT. NO.	THROUGH-BULKHEAD FITTING CAT. NO.	PIPE SIZE IN. METRIC SIZE DESIGNATOR*	THREAD	HEIGHT IN. MM	DIA. IN. MM	ACROSS FLATS IN. MM	"A" IN. MM	"B" IN. MM
STTB1_	STTTB1_	½	½-14	1.41	1.44	1.00	.75	.50
STTB2_	STTTB2_	¾	¾-14	1.47	1.69	1.25	.78	.53
STTB3_	STTTB3_	1	1-11½	1.69	2.00	1.53	.91	.59
STTB4_	STTTB4_	1¼	1¼-11½	1.78	2.38	1.84	.91	.66
STTB5_	STTTB5_	1½	1½-11½	1.81	2.75	1.13	.91	.66
STTB6_	STTTB6_	2	2-11½	1.84	3.25	2.63	.94	.66
STTB7_	—	2½	2½-8	2.28	3.75	3.13	1.22	.88
STTB8_	—	3	3-8	2.56	4.38	3.78	1.19	.91
STTB9_	—	3½	3½-8	2.56	5.00	4.28	1.38	.88
STTB10_	—	4	4-8	2.56	5.50	4.84	1.38	.88
STTB11_	—	5	5-8	2.72	6.63	5.91	1.47	.88
STTB12_	—	6	6-8	3.00	7.69	7.03	1.50	.97

* Metric size designator (ANSI C80.1-1994).
Dimensions shown are for uncoated fittings.