

POWER DISTRIBUTION | P1000 Series

P1000 Series

Leviton P1000 Series Rack PDUs are designed for data centers, wiring closets, and other environments that require cost-effective, “always-on” power. The robust, compact design ensures that these products can be used wherever reliability and density are important.

Features and Benefits

- All models feature circuit breaker protection to prevent current overloads
- Available in 120V or 208V versions with 15, 20, or 30A
- 208V PDUs come with 2-pole circuit breakers for added safety
- Surge-protected models prevent damage from transient surges
- LED indicators for power, grounding/polarity, and surge protection where applicable
- Hardwired power input cord
- 18-gauge cold-rolled steel construction
- Available in vertical Zero-U or horizontal 19-inch rack-mount styles
- Mounting hardware included; optional adjustable rack-mounting bracket available



A



B



C



D



E

Standards & Certifications

UL 60950-1 LISTED | #E228302

UL 1449 LISTED 3RD ED. | #E228302
(P1070 SERIES ONLY)

RECOMMENDED APPLICATIONS:

Data Center Cabinets

Telecommunications

Racks

For assistance selecting your power distribution units, please visit Leviton.com/pdu or call Tech Support at 800.824.3005.

Continued on next page

Continued from previous page

Unmetered Horizontal Power Distribution Units (PDUs), Single-Input

Cat. No.	Input				Output		Dimensions (in.) H x W x D
	Voltage	Current	Cord Length	Plug Type	Voltage	Receptacle Qty. & Type	
P1020-12S	120V	15A	12'	5-15P	120V	(10) 5-15R	1.75 x 17.5 x 4.5
[A] P1021-12S	120V	20A	12'	5-20P	120V	(10) 5-20R	1.75 x 17.5 x 4.5
P1022-12L	120V	20A	12'	L5-20P	120V	(10) 5-20R	1.75 x 17.5 x 4.5
P1023-12L	120V	30A	12'	L5-30P	120V	(16) 5-20R	3.5 x 17.5 x 4.5
[B] P1024-12L	208V	20A	12'	L6-20P	208V	(12) C13	1.75 x 17.5 x 4.5
P1025-12L	208V	30A	12'	L6-30P	208V	(16) C13	3.5 x 17.5 x 4.5

Unmetered Vertical Power Distribution Units (PDUs), Single-Input

Cat. No.	Input				Output		Dimensions (in.) L x W x D
	Voltage	Current	Cord Length	Plug Type	Voltage	Receptacle Qty. & Type	
P1040-10S	120V	15A	10'	5-15P	120V	(16) 5-15R	30 x 1.8 x 1.75
[C] P1041-10S	120V	20A	10'	5-20P	120V	(16) 5-20R	30 x 1.8 x 1.75
P1042-10L	120V	20A	10'	L5-20P	120V	(16) 5-20R	30 x 1.8 x 1.75
P1043-10S	120V	20A	10'	5-20P	120V	(24) 5-20R	48 x 1.8 x 1.75
[D] P1044-10L	120V	20A	10'	L5-20P	120V	(24) 5-20R	48 x 1.8 x 1.75
P1045-10L	120V	30A	10'	L5-30P	120V	(24) 5-20R	48 x 1.8 x 1.75
P1046-10L	208V	20A	10'	L6-20P	208V	(24) C13	48 x 2.19 x 2
[E] P1047-10L	208V	30A	10'	L6-30P	208V	(24) C13	48 x 2.19 x 2

Surge-Protected Vertical Power Distribution Units (PDUs), Single-Input


Cat. No.	Input				Output		Dimensions (in.) L x W x D
	Voltage	Current	Cord Length	Plug Type	Voltage	Receptacle Qty. & Type	
P1070-10S	120V	15A	10'	5-15P	120V	(16) 5-15R	30 x 2.19 x 1.73
P1071-10S	120V	20A	10'	5-20P	120V	(16) 5-20R	30 x 2.19 x 1.73
P1072-10L	120V	20A	10'	L5-20P	120V	(16) 5-20R	30 x 2.19 x 1.73
P1073-10S	120V	20A	10'	5-20P	120V	(24) 5-20R	48 x 2.19 x 1.73
P1074-10L	120V	20A	10'	L5-20P	120V	(24) 5-20R	48 x 2.19 x 1.73

All P1000 Series PDUs have hardwired cords



Vertical P1000 units ship with flat brackets, L-brackets, backplates, mounting buttons, screws, and washers to support a variety of workstation options.

Input Plug Types

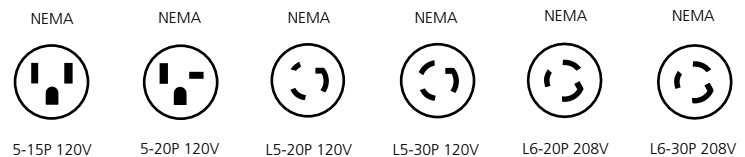

Output Receptacle Types

